

Nstat ESD Control

Premium Metal Expansion Wrist Straps - NS-260 Series

ESD Wrist Straps are the most common personal grounding device used in the Electrostatic Discharge Control or ESD Control industry. Why use a Wrist Strap ? Since ungrounded people are often the biggest cause of ESD damage, wrist straps are the first line of defence in ESD control. Seated operators must wear wrist straps. All operators that handle un-packaged ESD sensitive items must be grounded.

Standards


Meets ESD S1.1 cuff resistance interior = 100 Kiloohms (1 x 10e2 Ohms)
 Meets ESD S1.1 cuff resistance exterior = 10 Megohms (1 x 10e7 Ohms)

Part Numbers

ITEM	Description	Minimum Circumference	Maximum Circumference
NS-260-B	Band Only	6.50 in.	13 in.
NS-260-C10	Band, 10 ft. cord & Angle Banana	5.75 in.	13 in.

Specifications

- A. Nylon cap with slotted opening to allow size adjustment.
- B. 304 Stainless Steel Backplate forms channel to hold up to 10 links of band allowing size adjustment.
- C. 4mm snap stud from 304 Stainless Steel. Fits to 4mm spring loaded type socket. Coil cord disengages from snap with perpendicular force.
- D. Premium metal expansion wrist strap. Inside links are constructed of 304 Stainless Steel. Width of links is 0.630".
- E. Size is adjusted by sliding 1 to 10 links of the band into the backplate "U" channel.
- F. 304 Stainless Steel clip for electrical contact between snap stud and backplate.

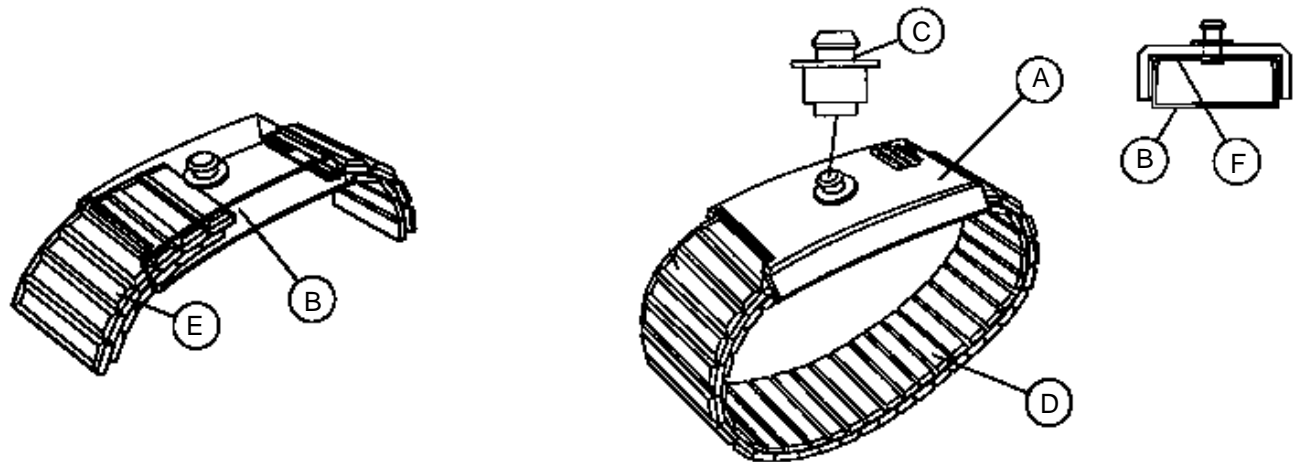

P R O D U C T D A T A S H E E T

Premium Metal Expansion Wrist Strap

PRODUCT

Premium Expansion Metal Wrist Strap

ITEM NUMBER

SEE ABOVE



Nstat ESD Control

USA and Canada: 1-866-516-7828
 Toll Free Mexico: 00180 05140052
 1004 Des Fabricants
 Terrebonne, QC, J6Y 2A6
 email: info@nstatesd.com
 www.NSTATESD.com