


Nstat ESD Control

ESD Hidden lock Floor Tiles NS-TL6MMESD

NSTAT has a unique interlocking system. It installs quickly and easily without the need for adhesives or padding. It can be applied directly on carpet and strong enough for fork truck traffic.

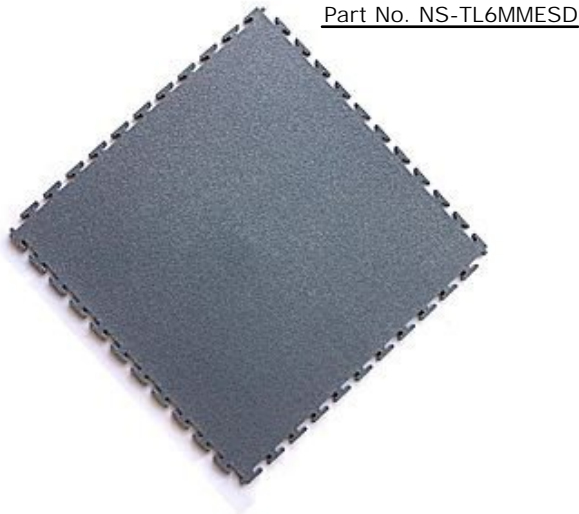

Specifications

Personnel Safety / Resistance to Ground: (Protection from Electric Shock)	> 7.5 x 10e5 Ohm
Protection to 100V Device Sensitivity: (Person to Ground Maximum Resistance)	< 3.5 x 10e7 Ohm Tested at 100V
Floor Surface to Ground Resistance / Volume Resistivity: * (Typical Average)	< 2.3 x 10e5 Ohm
Maximum Surface Resistance:	6.7 x 10e9 Ohm
Charging of test subject during running test:	1.1 kV
Thickness:	6mm
Dimensions:	19 3/4" x 19 3/4" , 2.57 Sq/Ft
Color:	Grey
Product Guarantee:	20 Years
Guarantee for ESD Performance:	Lifetime

* A Conductive strip is required to earth the tiles, one earth point required per 30m² of floor area to be covered or one earth point per section of tiles installed. (Which ever is the lower)

P R O D U C T D A T A S H E E T

ESD Hidden lock Floor Tiles NS-TL6MMESD

PRODUCT
ESD Floor Tiles

ITEM NUMBER
NS-TL6MMESD



Nstat ESD Control

USA and Canada: 1-866-516-7828
Toll Free Mexico: 00180 05140052
1004 Des Fabricants
Terrebonne, QC, J6Y 2A6
email: info@nstatesd.com
www.NSTATESD.com