


Nstat ESD Control

ESD Floor Tiles NS-TL6MMESD

NSTAT has a unique interlocking system. It installs quickly and easily without the need for adhesives or padding. It can be applied directly on carpet and strong enough for fork truck traffic.

Part No. NS-TL6MMESD

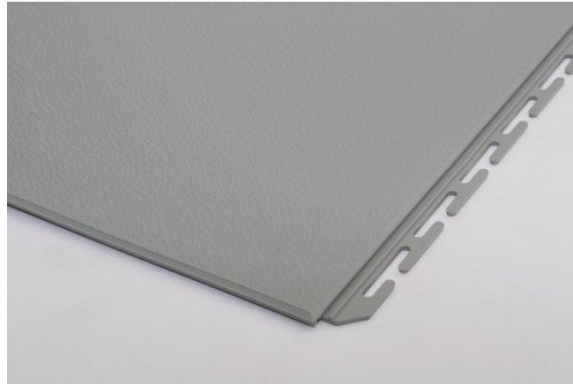

Interlocking System.

Specifications

Surface Resistivity:	2.2 x 10e4 Ohms to 3 x 10e6 Ohms
Resistance to Ground:	2.9 x 10e4 Ohms to 5.7 x 10e5 Ohms
Electrostatic Propensity:	< 10 Volts / <2.0 kV
Static Decay at 15% humidity:	0.01 sec
Thickness:	6mm
Dimensions:	19 3/4" x 19 3/4" , 2.57 Sq/Ft
Color:	Grey
Product Guarantee:	20 Years
Guarantee for ESD Performance:	Lifetime

* A Conductive strip is required to earth the tiles, one earth point required per 30m² of floor area to be covered or one earth point per section of tiles installed. (Which ever is the lower)

P R O D U C T D A T A S H E E T

ESD Floor Tiles NS-TL6MMESD

PRODUCT
ESD Floor Tiles

ITEM NUMBER
NS-TL6MMESD



Nstat ESD Control

USA and Canada: 1-866-516-7828
Toll Free Mexico: 00180 05140052
1004 Des Fabricants
Terrebonne, QC, J6Y 2A6
email: info@nstatesd.com
www.NSTATESD.com